

# **Operating Instruction**

# **Sparmax Spray Booth SB-88**




# **Spray Booth SB-88**

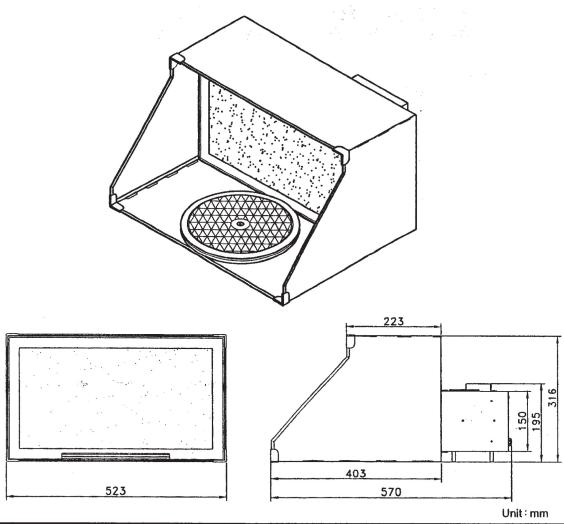

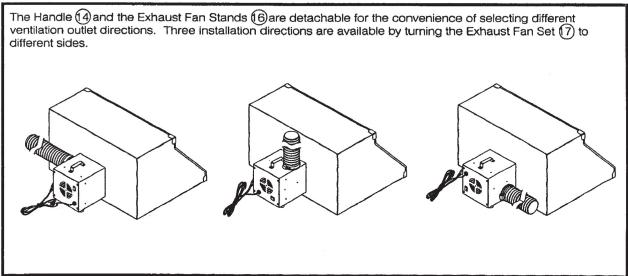


Y-SB88-04-2099 2009/01

## **Part List**

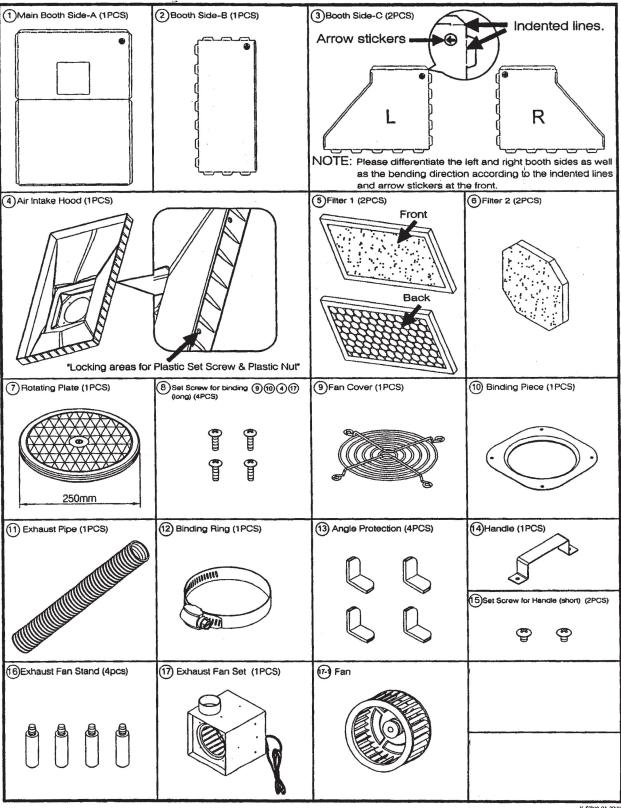

### **Installation Guide**

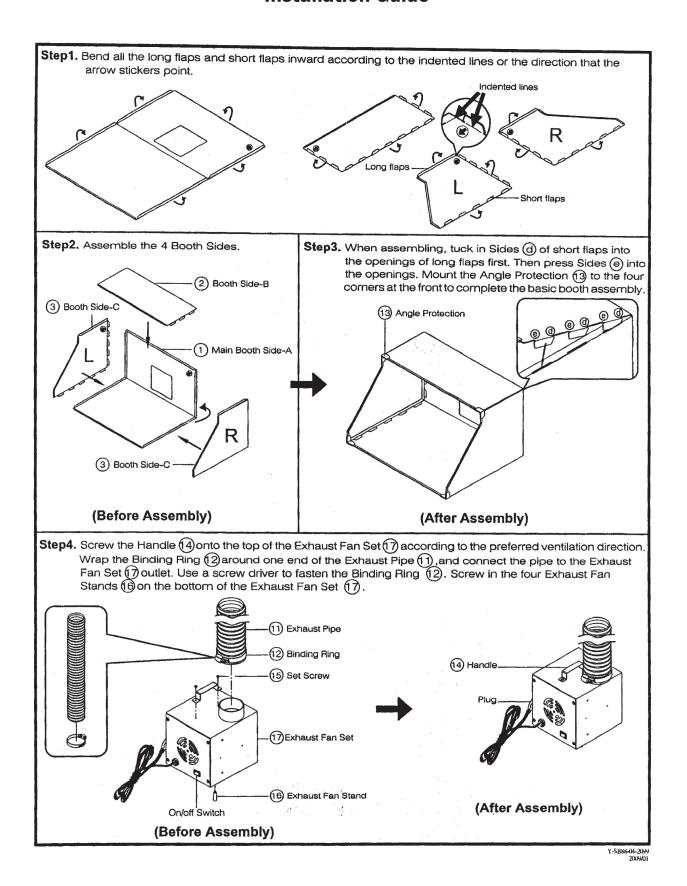


### **Installation Guide**

Step5. Place the Air Intake Hood 4 inside the spray booth. Use a screw driver to secure the Fan Cover 9, the Binding Piece 10 and the Air Intake Hood 4 together onto the Exhaust Fan Set 17 using the four Long set screws8.

Step6. Place one Filter 1(5) & one Filter 2(6) inside the spray booth, right in front of the Air Intake Hood (4).

Step7. Place the Rotating Plate (7) at the center of the spray booth.

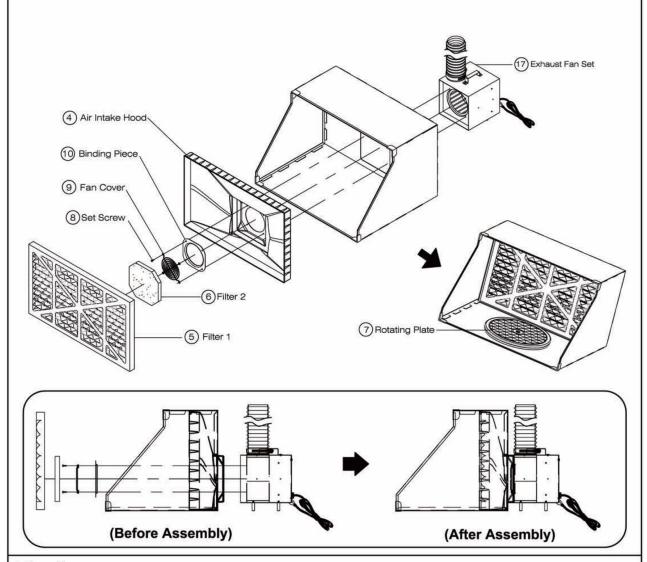

#### Attention:

- 1. During operation, try to place objects at the center of the booth.
- 2. After each use, keep the exhaust fan running for another 6~12 minutes, which will effectively clean out most of the remaining paint particles in the air.
- 3.To maintain the safety of electrical appliances, turn off the power switch and pull out the power cord from the receptacle when the exhaust fan is not in use.
- 4. To maintain the efficiency of filters, please replace the filter, on which large amounts of colors are accumulated. The expiration of the filter varies with individual's using habits and frequency.
- 5. Do not use any toxic, flammable, or explosive materials.
- 6. If the power cord is damaged, it must be replaced by the manufacturer, its service agent, or similarly qualified technicians to avoid hazards.
- 7. This appliance is not intended for use by persons with reduced physical, sensory or mental capabilities, or by those who lack experiences and knowledge (including children), unless they are given supervision or instruction concerning use of the appliance by a capable person responsible for their safety.

V-SB88-04-3510511